

a408 L / a409 S swift solo

NEW COLOURS



a408 swift solo L


a409 swift solo S



Direct Inframe Glazing a408

	mm	66 x 42 [2385 mm ²]
	mm	71
	mm	15
	°	26°

Necessary modification of the bevel on the inner side of lens for inframe glazing.



Direct Inframe Glazing a409

	mm	61 x 39 [2037 mm ²]
	mm	65
	mm	14
	°	26°

technology

vision

- 8-base decentered Lens
- Vision Advantage™ with LST™ Lens Concept



HYDROPHOBIC

- H ... hydrophobic coating on front
- Wrap-around View
- RX0™ – Direct Inframe glazing/ Performance Insert available
- Quick-Change Lens System™

protection

- SPX™ + Flex Zones™
- Polycarbonate Lens
- Wrap-around Protection


fit

- Double-Snap Nose Pads™
- Extended Nose Version available
- Ribbed Grip System

durability

- Quick-Release Hinge™

package consists of



RX0



for a408
a779



for a408
a515




for a409
a779



for a409
a515

colours

not all models/colours are available in all countries

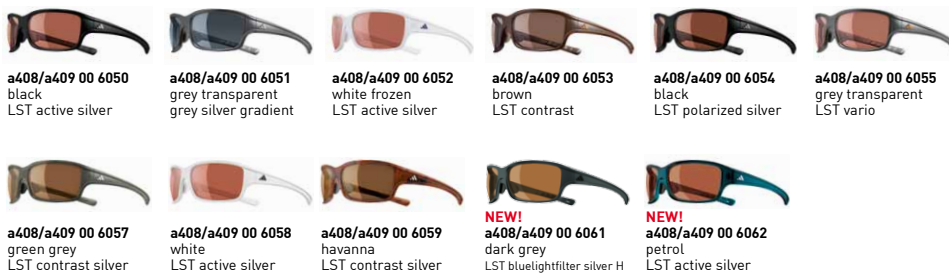

spare parts

antifog spare lenses [a408/a409]

SOG 68/362 LST active

spare lenses [a408/a409]

SOG 68/23 grey
SOG 68/99 LST contrast
SOG 68/109 LST active silver
SOG 68/117 grey silver gradient
SOG 68/174 LST contrast silver
SOG 68/277 LST bluelightfilter silver
SOG 68/293 LST active silver light
SOG 68/417 LST bright
SOG 68/420 clear
SOG 68/480 LST bluelightfilter silver H
SOG 104/449 LST polarized silver
SOG 130/359 LST vario

spare parts [a408/a409]

spare temples BC 629 (colour code) left/right
SP 109 nose pads
KST 51-4 extended nose bridge
ST 23-1 head strap fixation pin
SHS 15-2 microfiber bag
SHS 30 microfiber bag
SHE 151 hardcase competition
FK 81-3 box

Direct Inframe Glazing

RX0™ ability (8 Base) Sphere -/+ 4 dpt incl. 2 dpt cyl. Power RX0™ ability (8 base) please contact your local lens supplier to ensure the use of recalculated 8 base lenses, which consider the high wrap angle.

Unless use the Silhouette wrap-around calculator to counterbalance optical discrepancies due to the higher wrap angle. For an accurate result we recommend high index optical blanks.

Please contact your local lens supplier for detailed specification (lens colour, coatings, material) and also in case of bifocal or progressive lenses. Part manual-grinding of the lens bevel necessary – see instructions.

Detailed RX0™ information is contributed in the RX0™-catalogue sheets (K 9999 A1 0000 1000 and K 9999 A1 0000 1001)